MP45S Series

45 Watt Open Frame Medical Power Supply



Medical Power Specialists



Open-frame medical AC/DC adapter for up to 45 watts. This reliable converter meets all medical compliance requirements including 4th Edition EMC and Level VI efficiency. Available in single output DC voltages from 12V ~ 24V.

Key Features

- Medical IEC60601-1 Safety Approval
- Small 2" x 3" x 0.9" Package
- High Efficiency—to 93%
- Class I or Class II Construction

- Medical (BF) Approvals for Class I
- EN55011 / FCC Part 15J Class B Emissions
- 3 Year Warranty



Medical Monitor



POS System



Industrial Control



Medical Lighting






Models	Output Voltage	Output Current	Ripple & Noise (Max)	Total Regulation
MP45S-12	12V	3.8A	120mV	±3.0%
MP45S-15	15V	3.0A	150mV	±3.0%
MP45S-18	18V	2.5A	180mV	±3.0%
MP45S-24	24V	1.9A	240mV	±3.0%

Technical Highlights					
Input Voltage	80-264 VAC (Universal)	Efficiency	88%/92% min at 115/230 VAC, full load		
Leakage Current	<100μA @ 264VAC	Operating Temperature	-10°C ~ +50°C		
Output Voltage	See table above	Protection	Internal T2.0A/250V Fuse (Line & Neutral)		
Line Regulation	±1%	Isolation	Input to Output: 4000 VAC, 2x MOPP Input to Ground (Class I): 1500 VACC, 1x MOPP Output to Ground (Class I): 1500 VACC, 1x MOPP		
Load Regulation	±2.0%	МТВБ	200K Hours, Mil-217F at 25 °C, full load		
Outline dimension	2" x 3" x 0.9"	Weight	65g		

Note: Product specifications are subject to change without prior notice.



CB (€

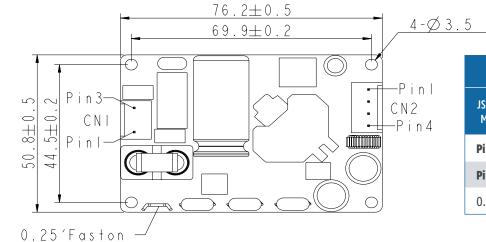

AC Input		DC Output	
JST P/N: B2P3 VH (LF)(SN) Mates With: JST VHR-3N		JST P/N: B4P VH (LF)(SN) Mates With: JST VHR-4N	
Pin 1	Line	Pin 1,2 Return	
Pin 3	Neutral	Pin 3 , 4 +V	
0.25"	Faston Earth		

ground tab